

Date:	Location:
Product:	Project:
Quantity:	Catalog #:

# LED 3 Multi Wattage Multi CCT 4 Foot Wrap Around Light

32W / 40W / 48W

#### **CONSTRUCTION:**

22-gauge metal housing with matte white finish. PMMA cover lens.

#### **OPTICAL SYSTEM:**

Samsung 2835 LED chips. Frosted lens. 110° beam angle.

#### **WARRANTY:**

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

#### **ELECTRICAL:**

Available as 120-277V input.  $-20^{\circ}$ C to  $50^{\circ}$ C,  $-4^{\circ}$ F to  $122^{\circ}$ F

#### **INSTALLATION & MOUNTING:**

Suspension or surface mounting options.

#### **CONTROLS & DIMMING:**

0-10V dimming comes standard.

#### **FEATURES**

- Default Wattage: 48W
- Default CCT: 5,000K
- IP20 rated
- 50,000 hours lifetime

#### **SUITABLE APPLICATIONS**

- Distribution Centers
- Aisles
- Corridors
- Restrooms
- Commercial Facilities
- Warehouses
- Stairwells



Suction cup to assist in lifting wrap cover included

### **DLC Product ID:**

LOC-4FTWA-MW(32/40/48)MCCT(35/40/50)D - S-YCUFDJ








Phone: (844) LEDONE6 | Fax: 1-510-217-9461 | Web: www.ledonecorp.com

## **LED 3 Multi Wattage Multi CCT 4 Foot Wrap Around Light**



	LOC-4FTWA-MW(32/40/48)MCCT(35/40/50)D								
WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES	
32W	3500K / 4000K / 5000K	3,680LM	115LM/W	120-277V	81.6	0.969	17.2%		
40W	3500K / 4000K / 5000K	4,600LM	115LM/W	120-277V	81.6	0.969	17.2%		
48W	3500K / 4000K / 5000K	5,814.72LM	120.5LM/W	120-277V	81.6	0.969	17.2%		

## **MEASUREMENTS**

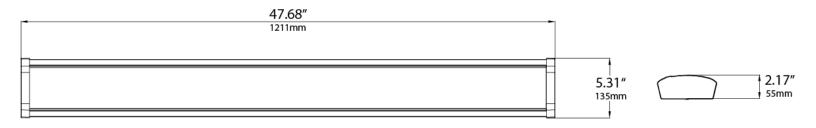

MODEL	QUANTITY	WEIGHT	UPC CODE
LOC-4FTWA-MW(32/40/48)MCCT(35/40/50)D	1	lbs	00810050942

Phone: (844) LEDONE6 | Fax: 1-510-217-9461 | Web: www.ledonecorp.com