

LED Residential Multi CCT Down Light



4"



5/6"

FEATURES

- Default CCT: 5,000K
 - 2,700K / 3,000K / 3,500K / 4,000K / 5,000K
- Commercial grade
- IP20 rated
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Kitchens
- Bedrooms
- Bathrooms
- Corridors
- Hallways
- Museums

CONSTRUCTION:

Downlight body and endcaps are both fabricated from aluminum for maximum rigidity.

OPTICAL SYSTEM:

Frosted lens. 120° beam angle

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Uses a -20°C to 40°C case temperature drive. Available as 120V input.

INSTALLATION & MOUNTING:

Use spring clips to install in place.

DIMMING:

Triac Dimming.





| MODEL NUMBER | SIZE | WATTAGE | LUMENS | EFFICACY | CRI | POWER FACTOR | REPLACES |
|-----------------------------------|------|---------|--------|----------|-----|--------------|----------|
| LOC-4RDL-7WMCCT(27/30/35/40/50)D | 4" | 7W | 650LM | 92.9LM/W | 83 | 0.82 | |
| LOC-56RDL-9WMCCT(27/30/35/40/50)D | 5/6" | 9W | 850LM | 94.4LM/W | 83 | 0.79 | |

Energy Star ID:

- LOC-4RDL-7WMCCT(27/30/35/40/50)D – 2401834
- LOC-56RDL-9WMCCT(27/30/35/40/50)D - 2402037

| Series | Size | Wattage Options | CCT Options |
|----------|------------|-----------------|--|
| LOC-#RDL | 4" 5/6" | 7W 9W | 2,700K 3,000K 3,500K 4,000K 5,000K |

MEASUREMENTS

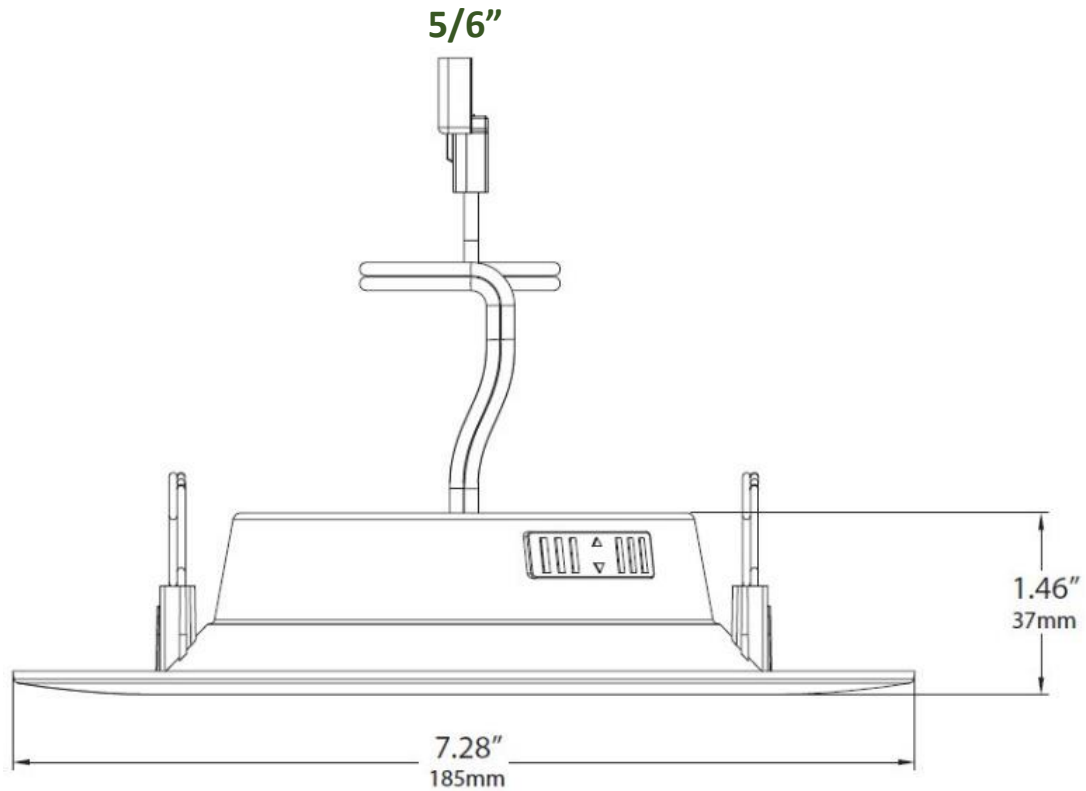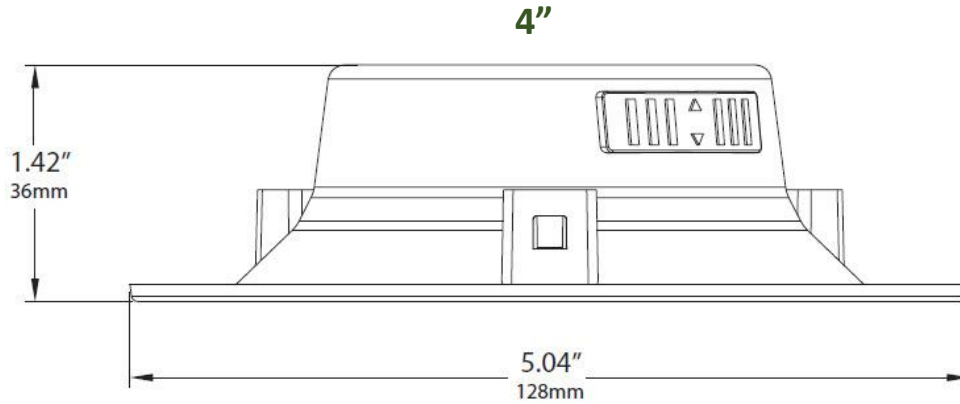

| MODEL | QUANTITY | WEIGHT | UPC CODE |
|-----------------------------------|----------|--------|----------------|
| LOC-4RDL-7WMCCT(27/30/35/40/50)D | 1 | lbs | 00810050942386 |
| LOC-56RDL-9WMCCT(27/30/35/40/50)D | 1 | lbs | 00810050942393 |